


Type sheet

Pressure relief valve


KITO® EV/o-...



Application

As emergency venting device for installation on storage tanks with a VRV to protect against hazardous excess pressure but minimize the loss of gas/vapours. Also suitable as replacement of a manhole. This device does not protect against the hazard of explosion or stabilized burning.

Dimensions (mm)

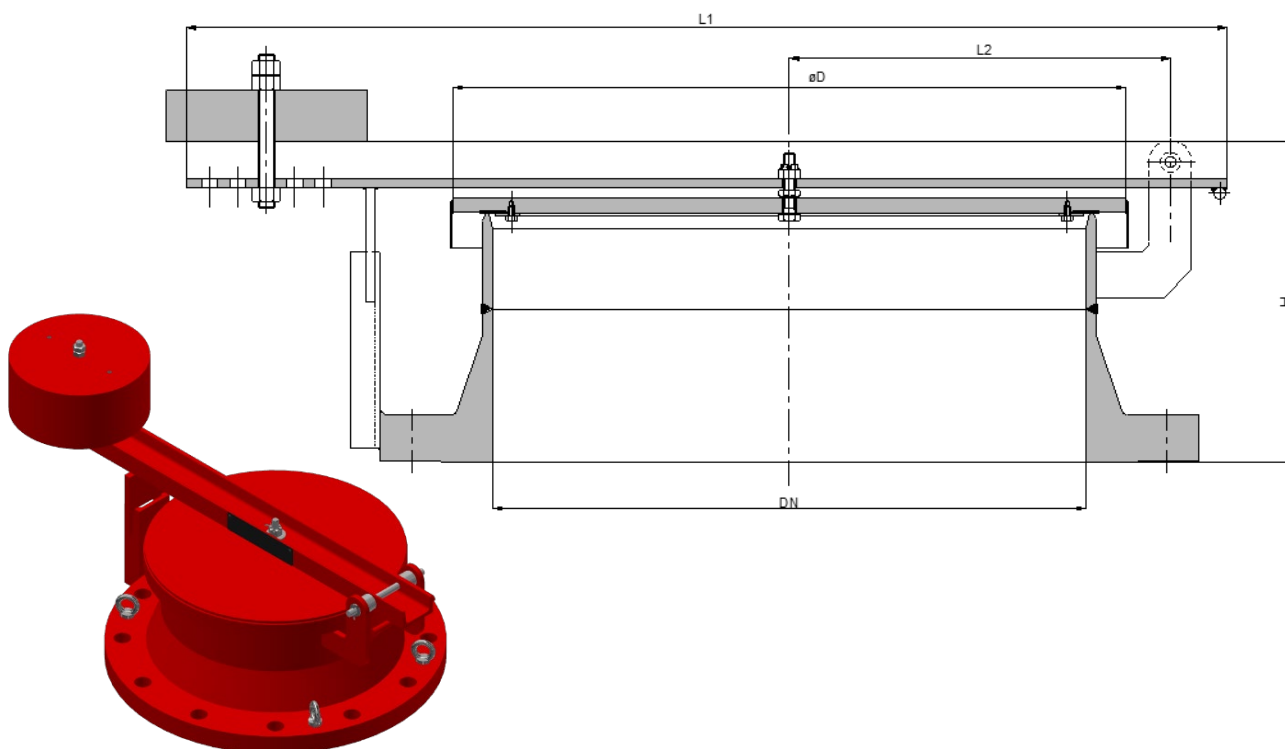

DIN	DN		D	H (DIN)	H (ASME)	H (API)	L1	L2	kg (DIN)	kg (ASME)	Kg (API)
	ASME	API									
100 PN 16	4"	-	155	159	183	-	350	96	10	13	-
150 PN 16	6"	-	205	162	197	-	450	126	15	19	-
200 PN 10	8"	-	255	181	221	-	550	162	25	32	-
250 PN 10	10"	-	310	187	221	-	650	192	33	42	-
300 PN 10	12"	-	370	187	233	-	750	219	41	62	-
350 PN 10	14"	-	400	197	256	-	750	236	51	78	-
400 PN 10	16"	-	460	239	294	-	900	274	70	106	-
450 PN 10	18"	-	510	239	307	-	1000	300	78	112	-
500 PN 10	20"	20"	560	242	311	311	1100	327	93	143	85
600 PN 10	24"	24"	670	256	328	328	1200	375	128	196	128

Indicated weights are understood without weight load and refer to the standard design

Example for order

KITO® EV/o-20" ASME
(design with flange connection 20" ASME B 16.5 Class 150)

Type examination certificate to EN 80079-36 and EN 80079-37 and -marking in accordance to ATEX-Directive 2014/34/EU


page 1 of 2



Type sheet

Pressure relief valve

KITO® EV/o-...




Design

	variant I	variant II
housing / valve seat edge	steel, stainless steel mat. no.1.4301	stainless steel mat. no.1.4301
valve pallet	steel	stainless steel mat. no.1.4301
lever	steel	stainless steel mat. no.1.4301
load weight	steel	stainless steel mat. no.1.4301
valve sealing	NBR, PTFE, EPDM (optionally)	
setting	5-100 mbar	
bolt	stainless steel	
protective hood (option)	stainless steel	
flange connection	EN 1092-1 Typ type B1, ASME B16.5 Class 150 RF, API standard 650 (optionally)	

Performance curves

The flow capacity V [Nm³/min] refers to a density of air with $\rho = 1.29 \text{ kg/m}^3$. When the set pressure is reached, the valve starts to open.

The indicated flow rates will be reached by an accumulation of 20 % above valve's setting (see DIN 4119).

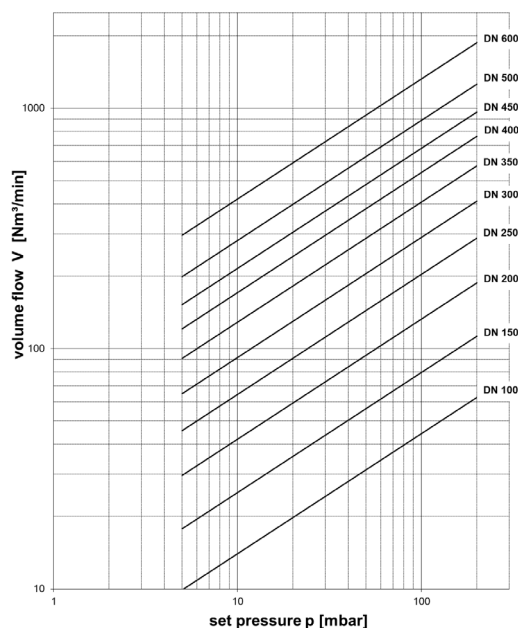

The volume flow at reduced lift will be reached by an accumulation of 10 % above valve's setting (see DIN 4119).

